




www.swastiklugs.in
spsslugs@yahoo.in

CODE SF- AC 22060

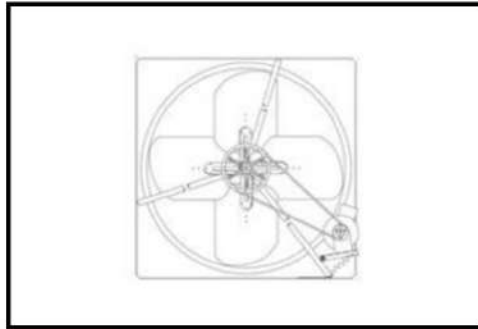

Specification


Size	172 x 172 x 50 mm
Bearing System	Sleeve Bearing & Ball Bearing
Impeller	Plastic with Fiber Glass filled UL 94V – 0
Housing	Die Cast Aluminium
Motor	Shaded Pole, Impedance Protected
Frequency	50 / 60 Hz
Withstand Voltage	DC 1500V / 0.5 Ma
Expected Life	Ball Bearing – 30,000 Hrs. (40 °C) Sleeve Bearing – 10,000 Hrs. (40 °C)
Temperature Range (non condensing environment)	Operating – 10 °C to 70 C Storage – 40 °C to 70 °C



www.swastiklugs.in
spsslugs@yahoo.in

CODE SF- AC 22060

Dimension & Drawing

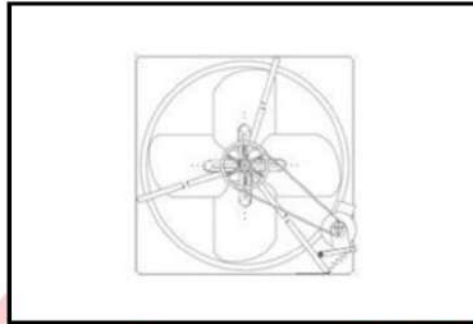

MODEL NO.	VOLTAGE (VAC)	FREQUENCY (Hz)	CURRENT (A)	POWER (W)	SPEED (RPM)	AIR VOLUME (CFM)	NOISE LEVEL (DB)
SF22060M 220	220/240	50/60	0.38/0.32	72/50	2300/2500	335/350	335/350

Tolerance = $\pm 5\%$