




www.swastiklugs.in
spsslugs@yahoo.in

SWASTIK COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS

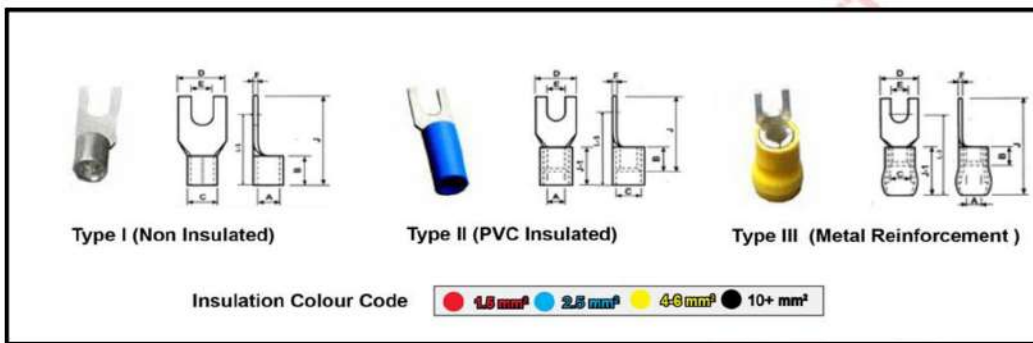


Area mm ²	E	A	C	D	F	B	K	H	L-1	J	Swastik Cat No.
1.5	5.1	1.6	3.2	8	0.8	5	2	10	17	21	RT 7214
1.5	3.5	1.6	3.2	6.8	0.8	5		4.8	11.8	13	RT 7249
1.5	3.0	2.0	2.8	6.2	0.8	5	2.4	3.1	10.5	13	RT 7250
2.5	3.5	2.3	3.9	6.5	0.8	5			11.8	15	RT 7251
2.5	5.0	2.6	4.6	10.6	1.0	6.2	2.5	4.3	12.4	21	RT 7280
4.6	3.1	3.5	5.5	6	1.0	6		6.2	11.5	15	RT 7252
4.6	3.5	3.5	5.5	6	1.0	6		5	11.0	15	RT 7253
10	6.5	4.5	6.9	16	1.2	8		11	19	27	RT 7254
10	8.2	4.5	6.9	16	1.2	8		11	19	27	RT 7255

Tolerance = ± 5%



www.swastiklugs.in
spsslugs@yahoo.in

SWASTIK COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS (INSULATED) FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS

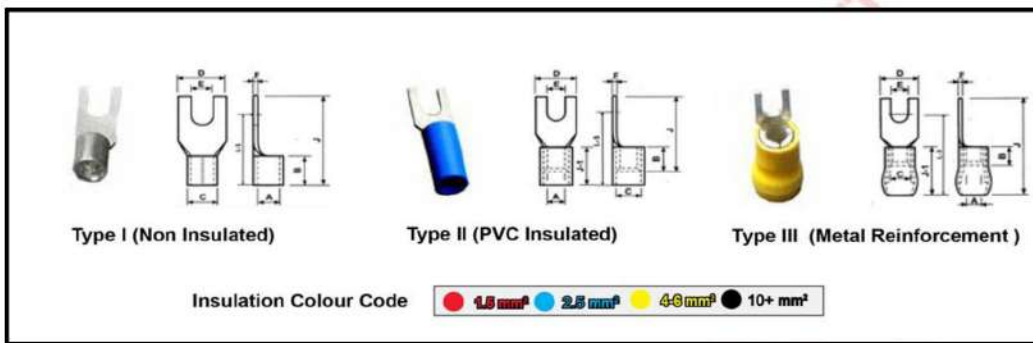

COLOUR CODING OF INSULATION SLEEVE

SIZE:	0.75	1.5	2.5	4.6	10
COLOUR:	YELLOW	RED	BLUE	YELLOW	BLACK


Area mm ²	E	A	C	D	F	B	K	H	C-1	J-1	L-3	J	Swastik Cat No.
1.5	5.1	1.6	3.2	8	0.8	5	2	10	21	4.8	10	27	RTI 7925
1.5	3.5	1.6	3.2	6.8	0.8	5		3.4	13	4.8	10	20.8	RTI 7926
1.5	3.0	2.0	2.8	6.2	0.4	5	2.4	3.1	13	4.8	10	20.5	RTI 7927
2.5	3.5	2.3	3.9	6.5	0.8	5		4.3	15	5.5	10	21.8	RTI 7928
2.5	5.0	2.6	4.6	10.6	1.6	6.2	2.5	6.2	21	5.5	10	20	RTI 7929
4.6	3.1	3.5	5.5	6	1.0	6		5.5	15	7.1	14	27.5	RTI 7930
4.6	3.5	3.5	5.5	6	1.0	6		5.0	15	7.1	14	27	RTI 7931
10	6.5	4.5	6.9	16	1.2	8		11	27	7.9	16	35	RTI 7932
10	8.2	4.5	6.9	16	1.2	8		11	27	7.9	16	35	RTI 7933

Tolerance = ± 5%



www.swastiklugs.in
spsslugs@yahoo.in

SWASTIK COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS (INSULATED WITH METAL REINFORCEMENT) FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS

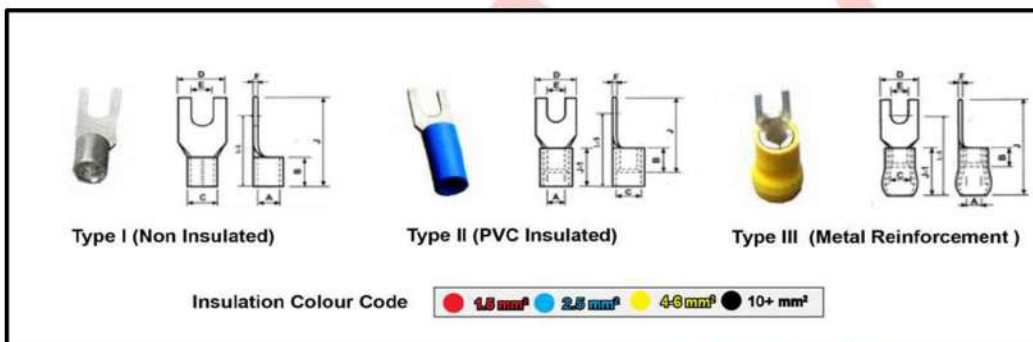

COLOUR CODING OF INSULATION SLEEVE

SIZE:	0.75	1.5	2.5	4.6	10
COLOUR:	YELLOW	RED	BLUE	YELLOW	BLACK

Area mm ²	E	A	C	D	F	B	K	H	J	J-1	A-1	C-1	C-2	L-3	Swastik Cat No.
1.5	5.1	1.6	3.2	8	0.8	5	2	10	21	10	3.6	4.8	5.4	22	RTR7934
1.5	3.5	1.6	3.2	6.8	0.8	4		4.8	13	10	3.6	4.8	5.4	14.8	RTR7935
1.5	3.0	2.0	2.8	6.2	0.4	5	2.4	3.1	13	10	3.6	4.8	5.4	15.5	RTR7936
2.5	3.5	2.3	3.9	6.5	0.8	5		4.3	15	10	4.4	5.4	6.0	16.8	RTR7937
2.5	5.0	2.6	4.6	10.6	1.6	6.2	2.5	6.2	21	10	4.4	5.4	6.0	16.2	RTR7938
4.6	3.1	3.5	5.5	6	1.0	6		5.5	15	15	6.4	7.1	8.6	20.5	RTR7939
4.6	3.5	3.5	5.5	6	1.0	6		5	15	15	6.4	7.1	8.6	20.0	RTR7940
10	6.5	4.5	6.9	16	1.2	8		11	27	17	6.8	8.3	9.5	28	RTR7941
10	8.2	4.5	6.9	16	1.2	8		11	27	17	6.8	8.3	9.5	28	RTR7942

Tolerance = ± 5%