



ISO 9001:2015 CERTIFIED

CATALOGUE


***COPPER RING
TERMINALS (NON
INSULATED)***

 *Years
Of Experience*

info@swastiklugs.in 
www.swastiklugs.in 

SWASTIK Ring Type Light Duty Cable Lugs used for Cable Wire Harness and Low Voltage Application. The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction. All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.

**MATERIAL : ETP GRADE COPPER
STANDARD : BS 1897
RANGE : 0.5 TO 150 SQMM**

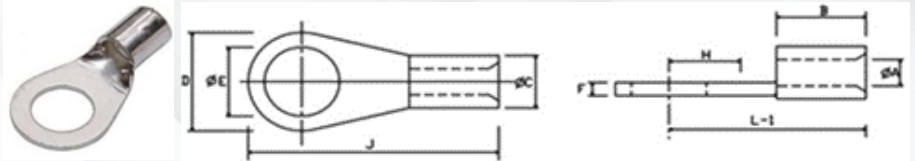


PRODUCT DESCRIPTION: SHEET METAL RING TYPE LUG

SWASTIK CAT NO	Size mm ²	Stud Hole E	A	C	D	F	B	H	L-1	J
RT-0.5 E-3	0.5	3.2	1.2	2.8	6	0.8	5	6	10.5	14
RT-0.5 E-4	0.5	4.2	1.2	2.8	8	0.8	5	7	12	16
RT-0.5 E-5	0.5	5.2	1.2	2.8	8	0.8	5	7	12	16
RT-001	1	4.2	1.3	2.9	7	0.8	5	4	10.5	14
RT-7153	1.5	3.2	1.6	3.2	6.8	0.8	5	3.6	9.6	13
RT-7048	1.5	3.7	1.6	3.2	6.8	0.8	5	3.6	9.6	13
RT-7049	1.5	4.2	1.6	3.2	6.8	0.8	5	3.6	9.6	13
RT-7154	1.5	4.2	1.6	3.2	7	0.8	5	5	11	14.5
RT-7103	1.5	2.2	1.6	3.2	6	0.8	5	4	11	14
RT-7000	1.5	2.6	1.6	3.2	6	0.8	5	4	11	14
RT-7001	1.5	3.2	1.6	3.2	6	0.8	5	4	11	14
RT-7002	1.5	3.7	1.6	3.2	6	0.8	5	4	11	14
RT-7003	1.5	4.2	1.6	3.2	6	0.8	5	4	11	14
RT-7104	1.5	3.2	1.6	3.2	8	0.8	5	5	12	16
RT-7004	1.5	4.2	1.6	3.2	8	0.8	5	5	12	16
RT-7005	1.5	5.2	1.6	3.2	8	0.8	5	5	12	16
RT-7105	1.5	4.2	1.6	3.2	10	0.8	5	6	13	18
RT-7006	1.5	5.2	1.6	3.2	10	0.8	5	6	13	18
RT-7007	1.5	6.4	1.6	3.2	10	0.8	5	6	13	18
RT-7106	1.5	6.4	1.6	3.2	12	0.8	5	6	12	18
RT-1.5-8	1.5	8.2	1.6	3.2	12	0.8	5	9	16	22
RT-7107	2.5	3.2	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7
RT-7008	2.5	3.7	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7
RT-7108	2.5	3.7	2.3	3.9	8	0.8	5	5	12	16
RT-7009	2.5	4.2	2.3	3.9	8	0.8	5	5	12	16
RT-7010	2.5	5.2	2.3	3.9	8	0.8	5	5	12	16
RT-7109	2.5	5.2	2.3	3.9	10	0.8	5	7	13	18
RT-7011	2.5	6.4	2.3	3.9	10	0.8	5	7	13	18
RT-7110	2.5	5.2	2.3	3.9	12	0.8	5	9	16	22
RT-7012	2.5	6.4	2.3	3.9	12	0.8	5	9	16	22
RT-7013	2.5	8.2	2.3	3.9	12	0.8	5	9	16	22
RT-7111	2.5	6.4	2.3	3.9	16	0.8	5	10	17	25
RT-7014	2.5	8.2	2.3	3.9	16	0.8	5	10	17	25
RT-7015	2.5	10.2	2.3	3.9	16	0.8	5	10	17	25
RT-7151	2.5	10.2	2.3	3.9	18	0.8	5	14	20	29
RT-7047	2.5	12.7	2.3	3.9	18	0.8	5	14	20	29
RT-7050	4-6	5.2	3.5	5.5	8	1	6	5	13	17
RT-7155	4-6	4.2	3.5	5.5	8	1	6	5	13	17

TOLERANCE: +/- 5%

SWASTIK Ring Type Light Duty Cable Lugs used for Cable Wire Harness and Low Voltage Application. The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction. All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.

MATERIAL : ETP GRADE COPPER
STANDARD : BS 1897
RANGE : 0.5 TO 150 SQMM

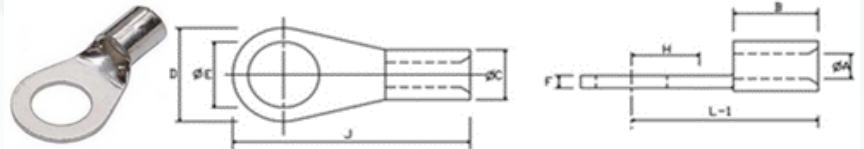


PRODUCT DESCRIPTION: SHEET METAL RING TYPE LUG STANDARD TYPE, BRAZED SEAM

SWASTIK CAT NO	Size mm ²	Stud Hole E	A	C	D	F	B	H	L-1	J
RT-7112	4-6	4.2	3.5	5.5	10	1	6	5	14	19
RT-7016	4-6	5.2	3.5	5.5	10	1	6	5	14	19
RT-7113	4-6	5.2	3.5	5.5	12	1	6	6	14	20
RT-7017	4-6	6.4	3.5	5.5	12	1	6	6	14	20
RT-7018	4-6	8.2	3.5	5.5	12	1	6	6	14	20
RT-7114	4-6	5.2	3.5	5.5	12	1	6	7	16	22
RT-7019	4-6	6.4	3.5	5.5	12	1	6	7	16	22
RT-7157	4-6	5.2	3.5	5.5	8	1	6	9.8	18.8	22.8
RT-7115	4-6	6.4	3.5	5.5	14	1	6	10.5	18.5	25.5
RT-7020	4-6	8.2	3.5	5.5	14	1	6	10.5	18.5	25.5
RT-7021	4-6	9.7	3.5	5.5	14	1	6	10.5	18.5	25.5
RT-7116	4-6	8.2	3.5	5.5	16	1	6	13	22	30
RT-7022	4-6	10.2	3.5	5.5	16	1	6	13	22	30
RT-7117	4-6	8.2	3.5	5.5	18	1	6	12	21	30
RT-7023	4-6	10.2	3.5	5.5	18	1	6	12	21	30
RT-7024	4-6	12.7	3.5	5.5	18	1	6	12	21	30
RT-7119	10	4.2	4.3	6.3	10	1	8	4	15	20
RT-7026	10	5.2	4.3	6.3	10	1	8	4	15	20
RT-7118	10	4.2	4.3	6.3	10	1	8	7	17	22
RT-7025	10	5.2	4.3	6.3	10	1	8	7	17	22
RT-7120	10	6.4	4.3	6.3	12	1	8	7	17	23
RT-7121	10	8.2	4.3	6.3	16	1	8	7	19	27
RT-7122	10	8.2	4.3	6.3	18	1	8	9	21	30
RT-7027	10	10.2	4.3	6.3	18	1	8	9	21	30
RT-7028	10	12.7	4.3	6.3	22	1	8	10	23	34
RT-7123	10	10.2	4.3	6.3	22	1	8	10	23	34
RT-7124	16	5.2	5.6	8	10	1.2	10	6	19	24
RT-7125	16	5.2	5.6	8	12	1.2	10	6	20	26
RT-7029	16	6.4	5.6	8	12	1.2	10	6	20	26
RT-7126	16	6.4	5.6	8	16	1.2	10	8	22	30
RT-7030	16	8.2	5.6	8	16	1.2	10	8	22	30
RT-7031	16	9.7	5.6	8	16	1.2	10	8	22	30
RT-7127	16	8.2	5.6	8	18	1.2	10	10	24	33
RT-7032	16	10.2	5.6	8	18	1.2	10	10	24	33
RT-7128	16	10.2	5.6	8	22	1.2	10	8	24	35
RT-7033	16	12.7	5.6	8	22	1.2	10	8	24	35
RT-7129	25	6.4	7.5	11.1	16	1.8	11	6	22	30
RT-7034	25	8.2	7.5	11.1	16	1.8	11	6	22	30

TOLERANCE: +/- 5%

SWASTIK Ring Type Light Duty Cable Lugs used for Cable Wire Harness and Low Voltage Application. The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction. All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.

MATERIAL : ETP GRADE COPPER
STANDARD : BS 1897
RANGE : 0.5 TO 150 SQMM

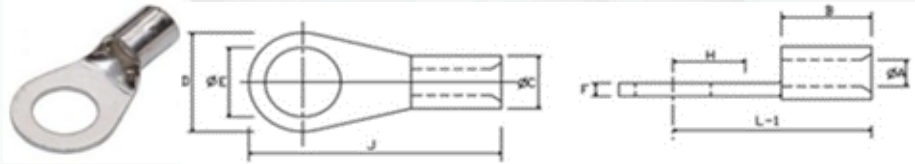

PRODUCT DESCRIPTION: SHEET METAL RING TYPE LUG STANDARD TYPE, BRAZED SEAM

SWASTIK CAT NO	Size mm ²	Stud Hole E	A	C	D	F	B	H	L-1	J
RT-7035	25	10.2	7.5	11.1	16	1.8	11	6	22	30
RT-7156	25	6.4	7.5	11.1	12	1.8	11	10	25	31
RT-7051	25	8.2	7.5	11.1	12	1.8	11	10	25	31
RT-7130	25	6.4	7.5	11.1	16	1.8	11	10	25	33
RT-7036	25	8.2	7.5	11.1	16	1.8	11	10	25	33
RT-7131	25	10.2	7.5	11.1	18	1.8	11	9	25	34
RT-7132	25	10.2	7.5	11.1	22	1.8	11	14	31	42
RT-7037	25	12.7	7.5	11.1	22	1.8	11	14	31	42
RT-7133	35	6.4	9	12.6	16	1.8	12	6	23	31
RT-7038	35	8.2	9	12.6	16	1.8	12	6	23	31
RT-7134	35	8.2	9	12.6	18	1.8	12	10	27	36
RT-7039	35	10.2	9	12.6	18	1.8	12	10	27	36
RT-7135	35	10.2	9	12.6	22	1.8	12	15	31	42
RT-7040	35	12.7	9	12.6	22	1.8	12	15	31	42
RT-7136	50	8.2	10.5	14.1	18	1.8	16	12	34	43
RT-7041	50	10.2	10.5	14.1	18	1.8	16	12	34	43
RT-7137	50	10.2	10.5	14.1	22	1.8	16	9	32	43
RT-7138	50	10.2	10.5	14.1	24	1.8	16	14	36	48
RT-7042	50	12.7	10.5	14.1	24	1.8	16	14	36	48
RT-7139	50	16.2	10.5	14.1	32	1.8	16	15	38	54
RT-7140	70	10.2	12	16	22	2	18	11	36	47
RT-7043	70	12.7	12	16	22	2	18	11	36	47
RT-7141	70	12.7	12	16	24	2	18	10	36	48
RT-7142	70	16.2	12	16	28	2	18	16	40	54
RT-7143	95	10.2	13.5	18.1	22	2.3	20	10	35	46
RT-7144	95	10.2	13.5	18.1	24	2.3	20	12	38	50
RT-7044	95	12.7	13.5	18.1	24	2.3	20	12	38	50
RT-7145	95	16.2	13.5	18.1	28	2.3	20	17	44	58
RT-7146/A	120	10.2	15	20.2	26	2.6	22	7	39	52
RT-7146	120	12.7	15	20.2	26	2.6	22	7	39	52
RT-7147	120	16.2	15	20.2	32	2.6	22	19	48	64
RT-7148	120	20.3	15	20.2	40	2.6	22	20	52	72
RT-7149	150	12.7	16.5	23.7	34	3.6	24	16	49	66
RT-7045	150	16.2	16.5	23.7	34	3.6	24	16	49	66
RT-7150	150	16.2	16.5	23.7	40	3.6	24	20	54	74
RT-7046	150	20	16.5	23.7	40	3.6	24	20	54	74

TOLERANCE: +/- 5%