



ISO 9001:2015 CERTIFIED

CATALOGUE

***COPPER RING
TERMINALS (PRE
INSULATED)***




A circular gold laurel wreath containing the number '35' in a bold serif font, followed by the words 'Years Of Experience' in a cursive script.
**35 Years
Of Experience**

info@swastiklugs.in
www.swastiklugs.in

COPPER RING TERMINALS (PRE INSULATED)

SWASTIK Ring Type Light Duty Cable Lugs used for Cable Wire Harness and Low Voltage Application. The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction. All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection. These terminals can be provided with PVC sleeves for protection against electrical shocks and can also be provided with metal reinforced sleeves to maintain a proper grip on conductor insulation.

**MATERIAL : ETP GRADE COPPER
WITH PVC SLEEVE
STANDARD : BS 1897
RANGE : 1.5 TO 4-6 SQMM**

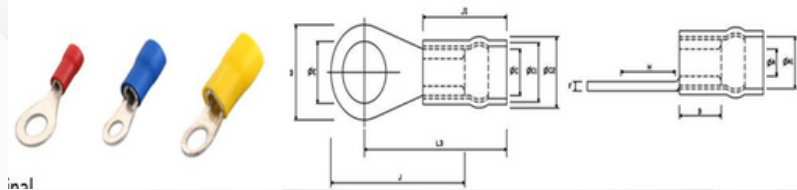

Color coding for insulated terminal **1.5** **2.5** **4.6**

PRODUCT DESCRIPTION: SHEET METAL RING TYPE LUG DOUBLE GRIP, WITH INSULATED SLEEVE


SWASTIK CAT NO.	Size mm ²	E	A	C	D	F	B	H	J	J-1	A-1	C-1	C-2	L-3
RTR-7435	1.5	2.2	1.6	3.2	6	0.8	5	4	14	10	3.6	4.8	5.4	16
RTR-7436	1.5	2.6	1.6	3.2	6	0.8	5	4	14	10	3.6	4.8	5.4	16
RTR-7437	1.5	3.2	1.6	3.2	6	0.8	5	4	14	10	3.6	4.8	5.4	16
RTR-7438	1.5	3.7	1.6	3.2	6	0.8	5	4	14	10	3.6	4.8	5.4	16
RTR-7439	1.5	4.2	1.6	3.2	6	0.8	5	4	14	10	3.6	4.8	5.4	16
RTR-7440	1.5	3.2	1.6	3.2	6.8	0.8	5	3	13	10	3.6	4.8	5.4	14.6
RTR-7441	1.5	3.7	1.6	3.2	6.8	0.8	5	3	13	10	3.6	4.8	5.4	14.6
RTR-7442	1.5	4.2	1.6	3.2	6.8	0.8	5	3	13	10	3.6	4.8	5.4	14.6
RTR-7443	1.5	3.2	1.6	3.2	8	0.8	5	5	16	10	3.6	4.8	5.4	17
RTR-7444	1.5	4.2	1.6	3.2	8	0.8	5	5	16	10	3.6	4.8	5.4	17
RTR-7445	1.5	5.2	1.6	3.2	8	0.8	5	5	16	10	3.6	4.8	5.4	17
RTR-7446	1.5	4.2	1.6	3.2	7	0.8	5	5	14.5	10	3.6	4.8	5.4	16
RTR-7447	1.5	4.2	1.6	3.2	10	0.8	5	6	18	10	3.6	4.8	5.4	18
RTR-7448	1.5	5.2	1.6	3.2	10	0.8	5	6	18	10	3.6	4.8	5.4	18
RTR-7449	1.5	6.4	1.6	3.2	10	0.8	5	6	18	10	3.6	4.8	5.4	18
RTR-7450	1.5	6.4	1.6	3.2	12	0.8	5	6	18	10	3.6	4.8	5.4	17
RTR-7451	2.5	3.2	2.3	3.9	6.5	0.8	5	3.5	12.7	10	4.4	5.4	6	17.7
RTR-7452	2.5	3.7	2.3	3.9	6.5	0.8	5	3.5	12.7	10	4.4	5.4	6	17.7
RTR-7453	2.5	3.5	2.3	3.9	8	0.8	5	5	16	10	4.4	5.4	6	17
RTR-7454	2.5	4.2	2.3	3.9	8	0.8	5	5	16	10	4.4	5.4	6	17
RTR-7455	2.5	5.2	2.3	3.9	8	0.8	5	5	16	10	4.4	5.4	6	17
RTR-7456	2.5	5.2	2.3	3.9	10	0.8	5	7	18	10	4.4	5.4	6	18
RTR-7457	2.5	6.4	2.3	3.9	10	0.8	5	7	18	10	4.4	5.4	6	18
RTR-7458	2.5	5.2	2.3	3.9	12	0.8	5	9	22	10	4.4	5.4	6	21
RTR-7459	2.5	6.4	2.3	3.9	12	0.8	5	9	22	10	4.4	5.4	6	21
RTR-7460	2.5	8.2	2.3	3.9	12	0.8	5	9	22	10	4.4	5.4	6	21
RTR-7461	2.5	6.4	2.3	3.9	16	0.8	5	10	25	10	4.4	5.4	6	22
RTR-7462	2.5	8.2	2.3	3.9	16	0.8	5	10	25	10	4.4	5.4	6	22
RTR-7463	2.5	10.2	2.3	3.9	16	0.8	5	10	25	10	4.4	5.4	6	22
RTR-7464	2.5	10.2	2.3	3.9	18	0.8	5	14	29	10	4.4	5.4	6	25
RTR-7465	2.5	12.7	2.3	3.9	18	0.8	5	14	29	10	4.4	5.4	6	25
RTR-7466	4-6	4.2	3.5	5.5	8	1	6	5	17	15	6.4	7.1	8.6	22

TOLERANCE: +/- 5%

COPPER RING TERMINALS (PRE INSULATED)

SWASTIK Ring Type Light Duty Cable Lugs used for Cable Wire Harness and Low Voltage Application. The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction. All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection. These terminals can be provided with PVC sleeves for protection against electrical shocks and can also be provided with metal reinforced sleeves to maintain a proper grip on conductor insulation.

**MATERIAL : ETP GRADE COPPER
WITH PVC SLEEVE
STANDARD : BS 1897
RANGE : 1.5 TO 4-6 SQMM**

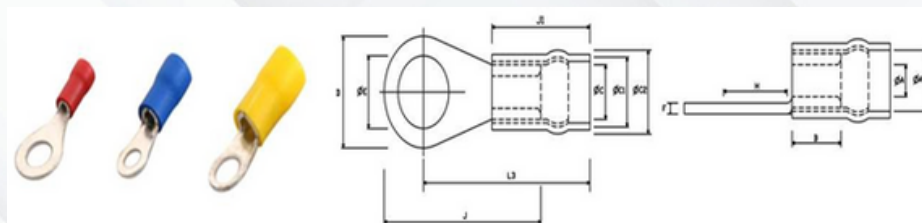

Color coding for insulated terminal **1.5** **2.5** **4.6**

PRODUCT DESCRIPTION: SHEET METAL RING TYPE LUG DOUBLE GRIP, WITH INSULATED SLEEVE

SWASTK CAT NO.	Size mm ²	E	A	C	D	F	B	H	J	J-1	A-1	C-1	C-2	L-3
RTR-7467	4-6	5.2	3.5	5.5	8	1	6	5	17	15	6.4	7.1	8.6	22
RTR-7468	4-6	4.2	3.5	5.5	10	1	6	5	19	15	6.4	7.1	8.6	23
RTR-7469	4-6	5.2	3.5	5.5	10	1	6	5	19	15	6.4	7.1	8.6	23
RTR-7470	4-6	5.2	3.5	5.5	8	1	6	9.8	22.8	15	6.4	7.1	8.6	31.8
RTR-7471	4-6	5.2	3.5	5.5	12	1	6	6	22	15	6.4	7.1	8.6	23
RTR-7472	4-6	6.4	3.5	5.5	12	1	6	6	20	15	6.4	7.1	8.6	23
RTR-7473	4-6	8.2	3.5	5.5	12	1	6	6	20	15	6.4	7.1	8.6	23
RTR-7474	4-6	5.2	3.5	5.5	12	1	6	7	22	15	6.4	7.1	8.6	25
RTR-7475	4-6	6.4	3.5	5.5	12	1	6	7	22	15	6.4	7.1	8.6	25
RTR-7476	4-6	6.4	3.5	5.5	14	1	6	10.5	25.5	15	6.4	7.1	8.6	27.5
RTR-7477	4-6	8.2	3.5	5.5	14	1	6	10.5	25.5	15	6.4	7.1	8.6	27.5
RTR-7478	4-6	9.7	3.5	5.5	14	1	6	10.5	25.5	15	6.4	7.1	8.6	27.5
RTR-7479	4-6	8.2	3.5	5.5	16	1	6	13	30	15	6.4	7.1	8.6	31
RTR-7480	4-6	10.2	3.5	5.5	16	1	6	13	30	15	6.4	7.1	8.6	31
RTR-7481	4-6	8.2	3.5	5.5	18	1	6	12	30	15	6.4	7.1	8.6	30
RTR-7482	4-6	10.2	3.5	5.5	18	1	6	12	30	15	6.4	7.1	8.6	30
RTR-7483	4-6	12.7	3.5	5.5	18	1	6	12	30	15	6.4	7.1	8.6	30

TOLERANCE:
+/- 5%