

CATALOGUE

COPPER TUBULAR TERMINAL ENDS MEDIUM DUTY



*Years
Of Experience*

info@swastiklugs.in




www.swastiklugs.in



SWASTIK Medium Duty Copper Tubular Terminal are made out of ETP grade copper, with purity 99.96% and having conductivity min 97.6% IACS. Terminal are tin plated to avoid oxidation and to achieve maximum corrosion protection. Annealed terminal to avoid cracking at time of crimping and chamfered mouth ensure easy cable insertion.

MATERIAL : ETP GRADE COPPER
STANDARD : BS 1897
RANGE : 2.5 TO 1000 SQMM
SURFACE : ELECTRO-TIN

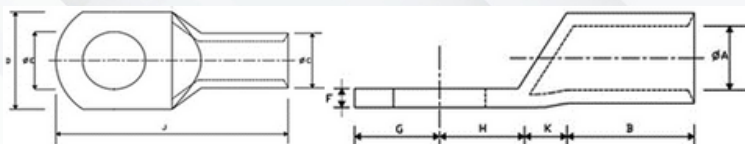

PRODUCT DESCRIPTION: COPPER TUBULAR TERMINAL WITH LIGHT DUTY

SWASTIK CAT NO.	Size mm ²	Stud Hole E	A	C	D	F	B	K	H	G	J
SCS-05	2.5	5.2	2	4	9	1	7	3	5	5	20
SCS-06	4	6.5	3.1	4.8	11	1	7	3	6	6	22
SCS-07	6	6.5	3.8	5.5	11	1	9	3	6	6	24
SCS-08	10	6.5	4.4	6.2	11	1.3	9	3	6	6	24
SCS-09	16	6.5	5.3	7.1	11	1.6	12	4	8	6	30
SCS-10	25	6.5	7	9	13	2	12	5	12	8	37
SCS-11	35	6.5	8	10	15	2	12	5	12	8	37
SCS-12	35	8.2	8	10	15	2	12	5	12	8	37
SCS-13	50	6.5	9.2	11.2	16	2	16	8	12	9	45
SCS-14	50	8.2	9.2	11.2	16	2	16	8	12	9	45
SCS-15	50	10.2	9.2	11.2	16	2	16	8	12	9	45
SCS-16	70	8.2	11.5	13.8	20	2.3	18	10	15	13	56
SCS-17	70	10.2	11.5	13.8	20	2.3	18	10	15	13	56
SCS-18	70	12.7	11.5	13.8	20	2.3	18	10	15	13	56
SCS-19	95	10.2	12.8	15.6	23	2.8	20	10	15	13	58
SCS-20	95	12.7	12.8	15.6	23	2.8	20	10	15	13	58
SCS-21	120	10.2	14.8	17.8	26	3	22	10	16	14	62
SCS-22	120	12.7	14.8	17.8	26	3	22	10	16	14	62
SCS-23	120	16.2	14.8	17.8	26	3	22	10	16	14	62
SCS-24	150	10.2	16	19.6	28	3.6	26	11	18	15	70
SCS-25	150	12.7	16	19.6	28	3.6	26	11	18	15	70
SCS-26	150	16.2	16	19.6	28	3.6	26	11	18	15	70
SCS-27	185	12.7	18	22	32	4	30	13	21	21	83
SCS-28	185	16.2	18	22	32	4	30	13	21	21	83
SCS-231	225	16.2	20	24	35	4	32	15	24	24	95
SCS-29	240	16.2	22	26	38	4	34	15	24	24	97
SCS-30	240	20.3	22	26	38	4	34	15	24	24	97
SCS-31	300	16.2	24	28.7	42	4.7	36	16	25	25	103
SCS-32	300	20.3	24	28.7	42	4.7	36	16	25	25	103
SCS-33	400	20.3	28	33.2	49	5.2	44	18	27	27	116
SCS-34	500	20.3	30	36	53	6	48	18	27	27	120
SCS-35	630	20.3	35	41.5	61	6.5	53	20	33	31	137
SCS-62	800	—	39	46.3	67	7.3	68	25	38	37	165
SCS-76	1000	—	43	53.8	76	10.8	90	30	45	45	210
TOLERANCE: +/- 5%											