


"SWASTIK" Weatherproof Type Double Compression Cable Glands (MEDIUM DUTY)
Suitable For Armoured Cables

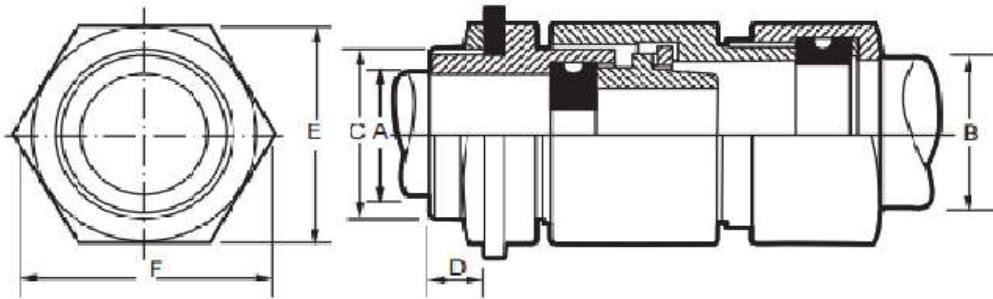

CABLE DIMENSION				GLAND DIMENSION					
SIZE	A (UNDER ARMOUR DIA) MM	B (OVER ALL DIA) MM	ARMOUR DIAMETER MM	ENTRY THREAD		D (LENGTH) MM	E (ACROSS FLAT) MM	F (ACROSS CORNER) MM	
				C					
				(ET)	(MM)				
10MM	8.0	9.5	0.8/1.4	1/2"	M20	24.0	17.75	59.0	
12MM	12.0	15.0	0.8/1.4	5/8"	M20	24.0	22.0	65.0	
16MM	12.0	16.0	0.8/1.4	3/4"	M20	24.0	23.0	67.0	
19MM	14.0	17.5	0.8/1.4	3/4"	M25	24.0	24.0	70.0	
22MM	14.0	19.0	0.8/1.4	3/4"	M25	24.0	25.5	72.0	
25MM	18.5	23.0	0.8/1.4	1"	M20	24.0	31.5	73.0	
28MM	21.5	26.0	0.8/1.4	1.1/8"	M25	24.0	34.5	76.0	
32MM	27.0	31.0	0.8/1.4	1.1/4"	M25	24.0	41.0	78.0	
35MM	30.0	35.0	0.8/1.4	1.3/8"	M32	24.0	45.5	80.0	
38MM	32.0	38.0	0.8/1.4	1.1/2"	M32	24.0	47.5	82.0	
45MM	38.0	46.0	0.8/1.4	1.3/4"	M40	24.0	56.5	83.0	
50MM	46.0	49.0	0.8/1.4	2"	M40	24.0	61.0	86.0	
57MM	48.0	57.0	0.8/1.4	2.1/4"	M32	24.0	67.0	86.0	
63MM	56.0	60.0	0.8/1.4	2.1/2"	M40	24.0	74.5	88.0	
70MM	63.0	68.0	0.8/1.4	2.3/4"	M50	24.0	82.5	90.0	
75MM	68.0	76.0	0.8/1.4	3"	M50	24.0	92.5	97.0	